

# JVC®

The Perfect Experience / —  
/


## NETWORK DOME CAMERA **VN-C655U**

High-resolution Indoor/Outdoor Network Camera with 25x Zoom, 30fps at VGA Mode (640x480) and Day & Night Features

**30** VGA  
fps

**V.NETWORKS**  
Visual Network System

### High-performance 25x Zoom Camera for Network-based 24/7 Surveillance

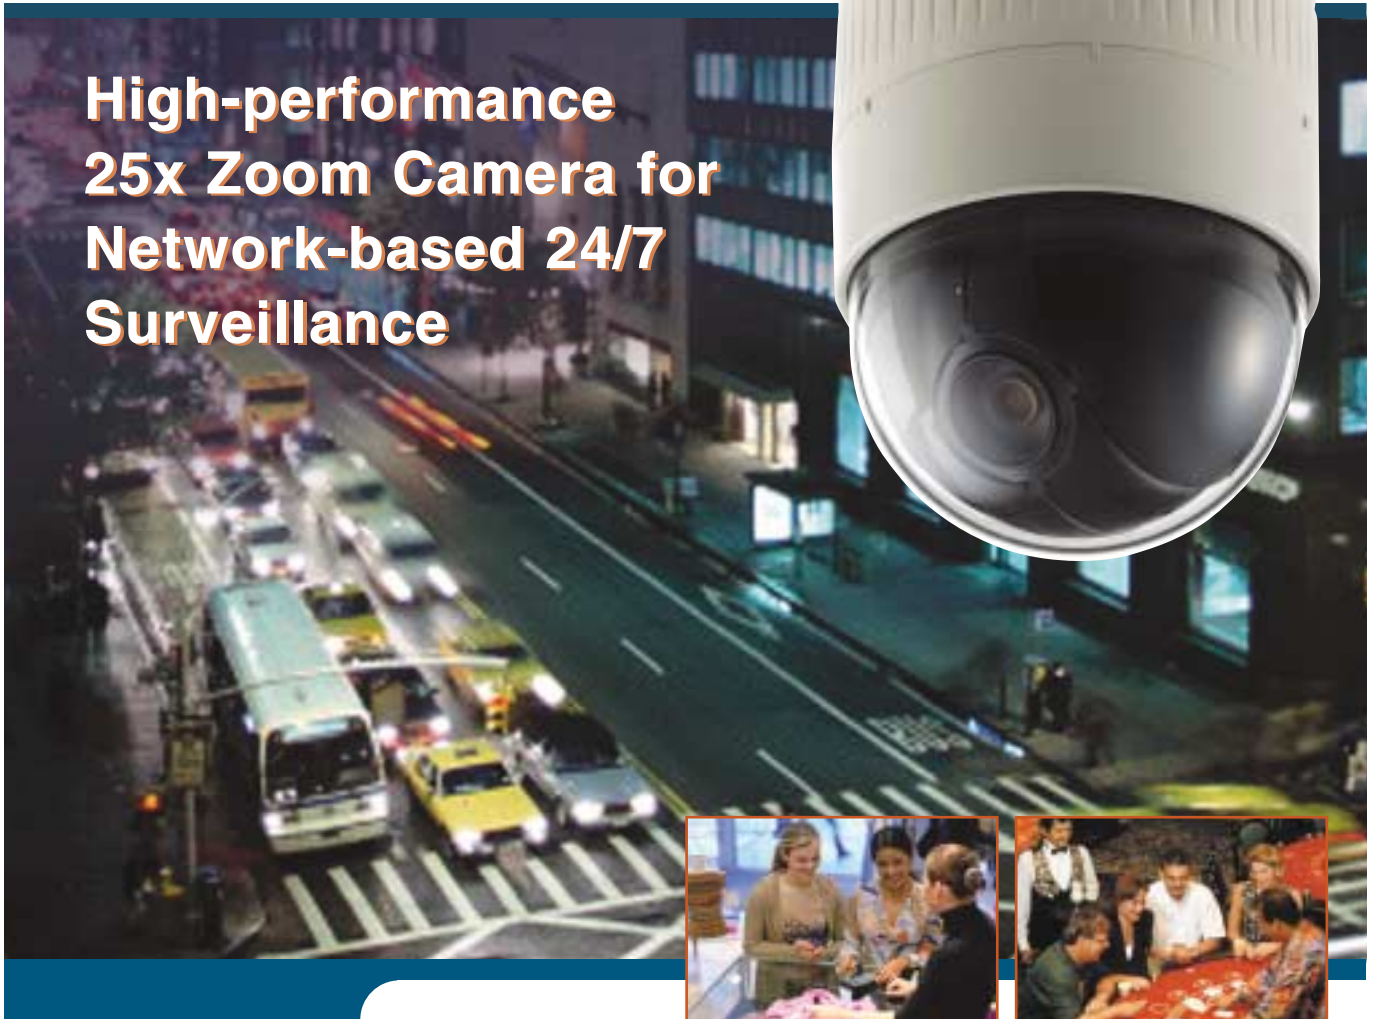

- 1/4-inch Hi-Resolution Interline Transfer CCD with 380,000 Effective Pixels
- 25x Optical Zoom Lens and 10x Electronic Zoom
- Up to 30fps Motion-JPEG in VGA Mode (640x480)
- Extended Dynamic Range
- Super-Lolux Sensitivity: 0.6lux at Color Mode, 0.06lux at B&W Mode
- Day and Night Operation with Mechanical IR Cut Filter: ON/OFF, Auto, Alarm, Timer
- 360° Endless Rotation
- Auto Patrol, Auto Pan, Auto Tour
- 100 Pre-set Positions
- AC 24V (AV Adapter included)/DC 18V Power Supply
- Auto Focus
- Privacy Mask/Motion Detection
- 3-level Password Protection: User/Operator/Administrator
- Internet Connectivity\*: Web Server, FTP Server/Client

*\* Scheduled for version upgrade in March 2005.*

# 25X Optical Zoom, Day & Night, and Removable IR Cut Filter Ensure Optimum Performance Around the Clock

*The JVC VN-C655U Network Dome Camera is the industry's first full function dome camera with built-in web server\*.*

## 1/4-inch CCD with 25x Optical Zoom

A high-resolution 1/4-inch interline transfer CCD with IR cut filter captures scenes in realistic color, while the zoom functions (25x optical + 10x electronic) provide excellent detail when and where it is needed.



## Extended Dynamic Range

Bright areas of a scene are shot with a high-speed shutter while dark areas receive normal exposure. Both sets of data are then combined to create a single, well-balanced image with light and dark areas perfectly exposed – another JVC innovation that makes a visible difference.

## Super LoLux Sensitivity & Nighttime Shooting

Even with light levels of just 0.6 lux, the VN-C655U can shoot high-quality color pictures thanks to Super LoLux technology. And at night the mechanical IR cut filter can be automatically retracted for infrared imaging (monochrome), making the camera sensitive enough to shoot in just 0.06 lux of ambient light.

## Versatile Camera Control

Highly sophisticated control of camera movements is enabled with such features as 360° endless panning and Auto Flip (ensuring no blind spots), variable pan/tilt speeds, Auto Pan and Auto Patrol with 100 pre-set positions, Privacy Mask (to protect selected areas from intrusive monitoring), and Auto Trace (to replay manual camera operations).

The VN-C655U can be controlled via the JVC VN-S400U Software or VR-N100 Network Video Recorder and Client Software.



## 30fps Motion-JPEG (VGA)

The high-quality images are output as Motion-JPEG format with resolution up to 640x480 pixels and a maximum frame rate of 30fps. Any computer on the network can be used to monitor and store this video stream, and a future upgrade to add Internet capability to the VN-C655U will allow remote access from virtually anywhere in the world.

## Specifications

CAMERA	
Signal format	NTSC
Image device	1/4 inch interline transfer CCD
Effective pixels	380,000 pixels, 768 (H) x 494 (V)
Scanning frequencies	Horizontal 15.625 kHz, Vertical 50 Hz
Horizontal resolution	480 TV lines (typical, analog video out)
Sensitivity	
Color	2.0 lux (AGC 20dB, 50% video, wide end) 0.6 lux (AGC 20dB, 25% video, wide end) 0.07 lux (AGC 20dB, 50% video, wide end, 32x slow shutter)
B/W with IR light	0.06 lux (at F1.6, AGC 20dB, 50% video, wide end)
Dynamic range	50dB
White balance	TTL Auto Tracking/Manual
Electronic shutter	1/60, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 sec.
Slow shutter	32x
Backlight compensation	4 photometry areas selectable
LENS	
Zoom ratio	Approx. 25x optical, 10x electronic
Zoom range	3.8 mm to 95 mm
Maximum aperture	F1.6 (WIDE) to F3.7 (TELE)
Auto focus	Easy AF/One Push AF
MOVING MECHANISM	
Preset positions	100
Panning range	360° endless rotation
Panning speed	1°/sec. to 300°/sec.
Tilting range	0° to 90°
Tilting speed	1°/sec. to 180°/sec.
NETWORK	
Network interface	10BASE-T/100BASE-TX
Communication protocol	TCP/IP, UDP/IP, HTTP*, FTP*, ICMP, ARP, DHCP, NTP
Image compression	JPEG (7 levels)
Picture resolution (Pixel)	640 x 480, 320 x 240
Frame rate	Max. 30fps
Internal storage capacity	8MB (RAM)
Data transmission	Multicast/Unicast
Access protection	Password (3 levels)
Viewing	JVC controller software (Included)
GENERAL	
Outer cover	Clear
Alarms	Input/Output x 2
Power supply	DC 18 V (AC-Adapter included)
Power consumption	1.4 A (max.)
Operating temperature	-20° C to 50° C (-4° F to +122° F) with optional environmental housing
Dimensions (diameter)	152 mm
Weight (net, approximate)	2.2 kg
SYSTEM REQUIREMENTS for JVC CONTROL SOFTWARE	
Operating system	Windows® 2000 Pro (SP1 or later)/ Server (SP1 or later) Windows® XP Pro/Home edition
CPU	Pentium® III 500MHz or higher (3.2GHz or higher recommended)
Memory	128MB or more (1GB or more recommended)
Hard disk space	20MB or more
Display/video card	1024 x 768 pixels or more, True Color (24bit or 32bit), (128MB or more VRAM recommended)
UL standard	60950
FCC class	Part 15, Class A

\*Scheduled for version upgrade in March 2005

## Options

- Pendant Mount
- Wall Mounting Bracket
- Outdoor Pendant Mount
- Ceiling Bracket
- Ceiling Recessed Housing

Design and specifications subject to change without notice.

# JVC®

DISTRIBUTED BY



■ The Hachioji Plant of Victor Company of Japan, Ltd., has received ISO14001 and ISO9001 Certifications under the global standard for environmental management.

